




Configuration *Barrierboard / Masonry / Plasterboard*

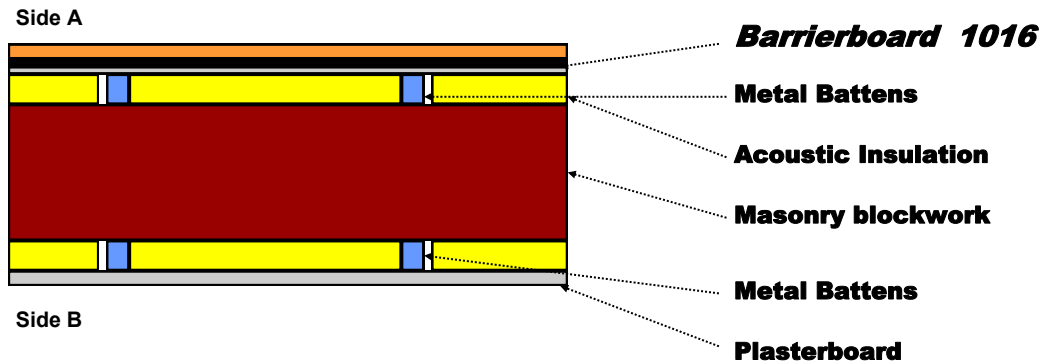

Applications - retrofit and new installations

Construction Details

Side A	<i>Barrierboard 1016</i>			
Battens	28mm furring channel	FRL rating	Wall thickness	Rw rating
Insulation	TNC acoustic 2520 polyester	120/120/120	270mm	60 Ctr-7 assessed
Masonry	CSR/PGH Extruded clay 150 wide			
Insulation	TNC acoustic 2520 polyester			
Battens	28mm furring channel			
Side B	13mm direct fixed plasterboard			

Acoustic Performance

Frequency Hz	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000
For specific performance assessment, contact our office																	

